


①




Remove rail end caps.

②



Clamp guide rail to work surface with Guide Strip hanging over edge. Apply strong downward pressure on corner of Guide Strip to break free.

③

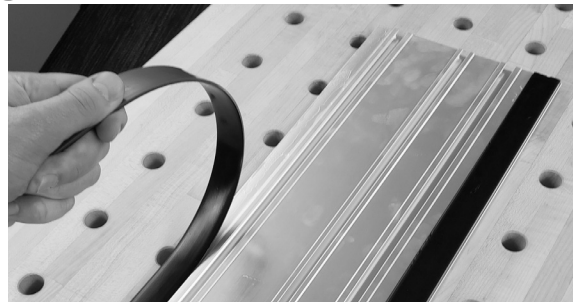


Flip guide rail over and remove guide strip. The guide strip is attached with strong adhesive but is able to be removed.

④




Using a shop cloth, remove excess glue residue with common adhesive removal product.

⑤

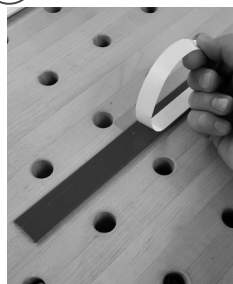

Remove the protective backing from replacement guide strip.

⑥

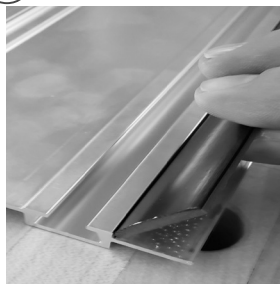

With adhesive side facing main track body, align end of guide strip with end of track and fit into groove. Once positioned correctly, firmly press into set.

⑦



①




Remove rail end caps.

②




Clamp guide rail to work surface with Guide Strip hanging over edge. Apply strong downward pressure on corner of Guide Strip to break free.

③

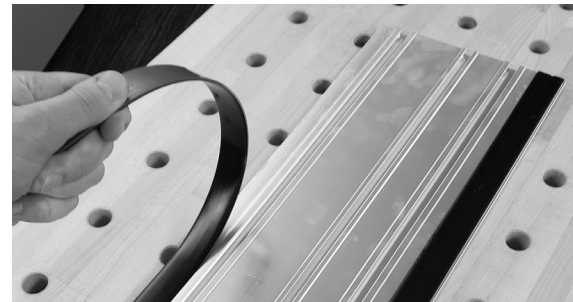

Flip guide rail over and remove guide strip. The guide strip is attached with strong adhesive but is able to be removed.

④



Using a shop cloth, remove excess glue residue with common adhesive removal product.

⑤



Remove the protective backing from replacement guide strip.

⑥



With adhesive side facing main track body, align end of guide strip with end of track and fit into groove. Once positioned correctly, firmly press into set.

⑦

